Circular Economy in Food Industry Waste Management (BIVALIA Workshop2 - 2026)

Editors: Elena Diaz Nieto; Francisco Heras Muñoz; Juan Antonio Melero Hernández; Manuel Gertrudix
Madrid, BIVALIA, UAM-URJC, 2026
DOI: 10.5281/zenodo.22206833 · CC BY 4.0
Full volume: https://books.ciberimaginario.cloud/libro/bivalia-w2-2026

OFFPRINT · PP. 54–55

P.II.4 — Thermal pyrolysis of grape stalk under inert and pressurised hydrogen atmospheres: effect of reactor configuration on bio-product distribution

L. Amodio[1], C. Castellani[1], S. Arshad[1], P. Pizarro[1,2], J. Cueto[1], D. Serrano[1,2*]

1: Thermochemical Processes Unit, IMDEA Energy Institute, Avda. Ramón de la Sagra 3, 28935 Móstoles, Madrid, Spain | 2: Group of Chemical and Environmental Engineering, Universidad Rey Juan Carlos, C/ Tulipán s/n, 28933 Móstoles, Madrid, Spain

Grape stalk; biomass valorisation; Pyrolysis; Pressurised hydrogen

HOW TO CITE THIS CONTRIBUTION

L. Amodio, C. Castellani, S. Arshad, P. Pizarro, J. Cueto, D. Serrano. (2026). P.II.4 — Thermal pyrolysis of grape stalk under inert and pressurised hydrogen atmospheres: effect of reactor configuration on bio-product distribution. In: Diaz Nieto, E., Heras Muñoz, F., Melero Hernández, J. A., Gertrudix, M. (Eds.), Circular Economy in Food Industry Waste Management (BIVALIA Workshop2 - 2026), pp. 54–55. BIVALIA, UAM-URJC. https://doi.org/10.5281/zenodo.22206833

Poster Presentations #30

P.II.4 — Thermal pyrolysis of grape stalk under inert and pressurised hydrogen atmospheres: effect of reactor configuration on bio-product distribution

L. Amodio[1], C. Castellani[1], S. Arshad[1], P. Pizarro[1,2], J. Cueto[1], D. Serrano[1,2]*

[1] Thermochemical Processes Unit, IMDEA Energy Institute, Avda. Ramón de la Sagra 3, 28935 Móstoles, Madrid, Spain | [2] Group of Chemical and Environmental Engineering, Universidad Rey Juan Carlos, C/ Tulipán s/n, 28933 Móstoles, Madrid, Spain

**Correspondence: david.serrano@energia.imdea.org*

Keywords: *Grape stalk; biomass valorisation; Pyrolysis; Pressurised hydrogen*

Winemaking generates 10.5-13.1 million tonnes of solid by-products worldwide each year [1]. Grape stalks are a largely underexploited lignocellulosic stream whose high lignin and cellulose content makes them an attractive renewable carbon source for the biorefineries. Pyrolysis offers a flexible, scalable route to valorise this biomass into bio-oil, gas, and biochar.

Grape stalks from a local Madrid winery (volatile matter ~65 wt.%, ash ~5 wt.%) were pyrolysed in upflow (UF) and downflow (DF) fixed-bed configurations at 550 °C, comparing two atmospheres: inert nitrogen at atmospheric pressure (1 bar/N_2) and pressurised hydrogen (6 bar/H_2).

The main product yields are presented in Figure 1A. In the UF, changing the atmosphere slightly affected the product distribution, reducing char formation in favour of gas production. Under 1 bar/N2, the DF yields ~19 wt.% bio-oil, over three times the UF value, owing to shorter vapour residence time minimising secondary cracking. Nevertheless, the undetected GC-MS fraction under DF/N2 (Figure 1B-inset), reaches the largest value across all conditions, consistent with significant lignin-derived oligomer formation. Pressurised H2 (6 bar) in DF reactor, strongly suppresses this advantage, converging bio-oil yields to ~6 wt. %, while promoting partial deoxygenation and hydrocracking of heavy oligomers into lighter detectable compounds, mainly gas. Oxygenated aromatics (O-AR), though minor, appear only in the DF, suggesting that the shorter vapour residence time preserves these primary lignin-derived products, which under the longer UF contact are likely further deoxygenated or repolymerised into heavier, GC-undetectable fractions. Overall, N2 in DF maximises bio-oil along with acids, light oxygenates, and furans, pressurised H2 shifts conversion towards lighter products and nearly eliminates furans via hydrodeoxygenation. This demonstrates that atmosphere and reactor configuration act as complementary levers for tailored bio-product distributions from grape stalks.

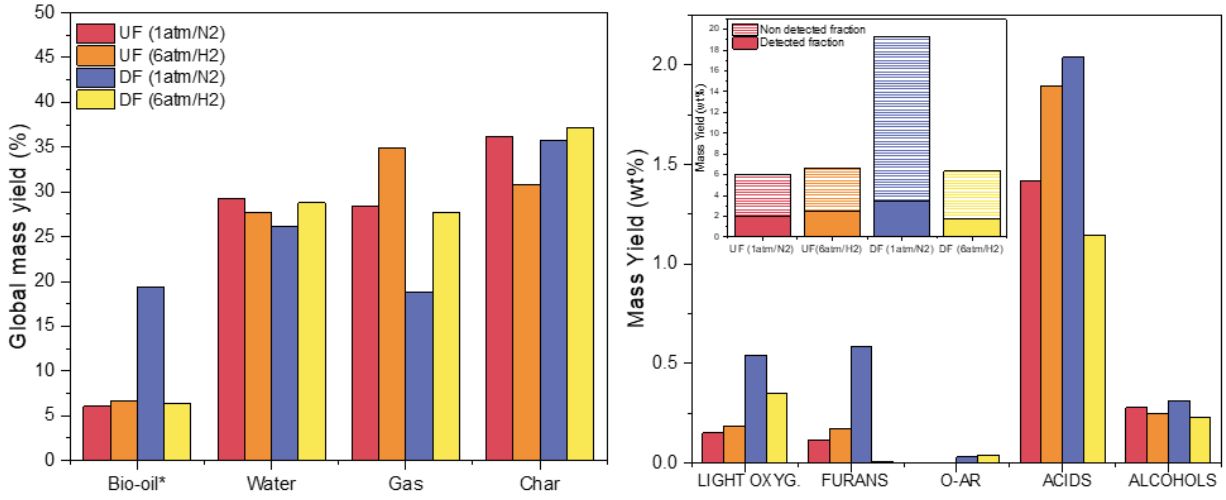


Figure 1. Global bio-oil, water, gas and char yields (a) and bio-oil fraction yields by GC-MS (b) for all four pyrolysis conditions.

© 2026 BIVALIA-CM (TEC-2024/BIO-177) · CC BY 4.0 · DOI: 10.5281/zenodo.22206833

Acknowledgements

The authors thank “Comunidad de Madrid” for financial support to BIVALIA-CM project (TEC-2024/BIO-177), through the “Tecnologías 2024” programme.

References

[1] M. Oliveira et al., "Transforming Wine By-Products into Energy: Evaluating Grape Pomace and Distillation Stillage for Biomass Pellet Production," *Applied Sciences*, vol. 14, no. 16, p. 7313, 2024. https://doi.org/10.3390/app14167313

© 2026 BIVALIA-CM (TEC-2024/BIO-177) · CC BY 4.0 · DOI: 10.5281/zenodo.22206833